


# **BARGAIN** *Fittings*


## **Installing a stainless steel diptube.**

The diptube is designed for a sanke keg. It comes with 2 stainless steel rings (ferrules), 2 silicone o-rings, a stainless steel 1/2" tube compression x 1/2" male NPT fitting. Remove the blue/clear cap if it came with one, unscrew the stainless compression nut and take out the 2 metal rings.

For a permanent installation you can use the two provided rings and tighten down the compression nut fully until it compresses the large ring onto the metal tube. Add the compression nut and then the smaller ring with the narrow end point toward the fitting. Add the larger ring with the narrow end facing the fitting as pictured below..

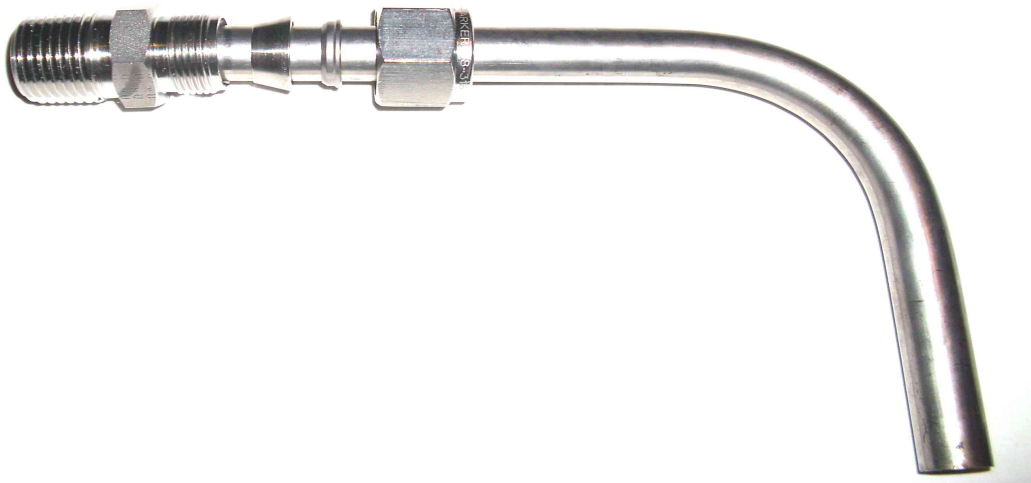

If you want a non permanent solution use the 2 o-rings provided as pictured below:

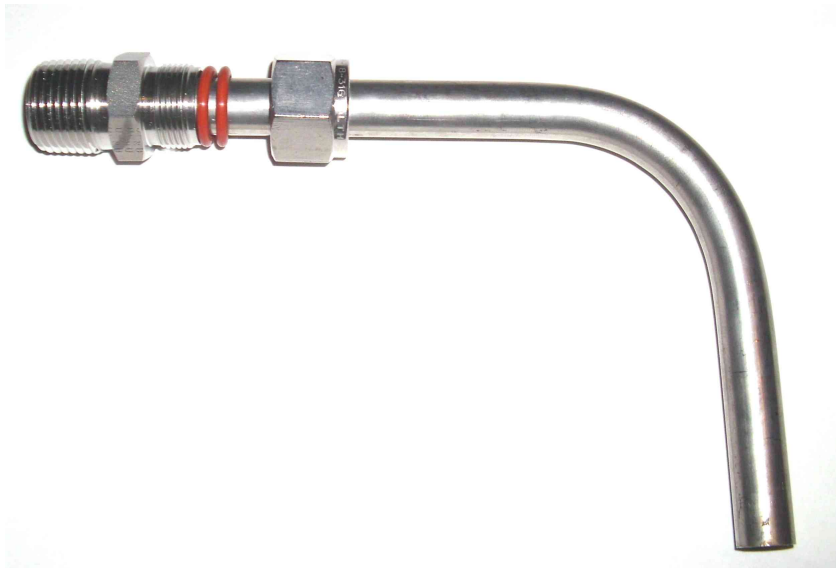

Apply several wraps of teflon tape to male thread and screw fitting into the coupling in the keg  
You will need to tighten down the nut fully. The tube will pull out if you pull hard on it but it will remain inside and sealed.

For the permanent installation you will need to tighten down the compression nut fully until it compresses the large ring onto the metal tube.

You will still be able to remove the pickup tube portion but the ring will be permanently compressed onto the tube.

